

osborn®



Tools for Stationary Machines

Product Catalog

Stationary Machines


Wheel Brushes	4
Roller Brushes	17
End Brushes	17
Accessories	18

Stationary Machines

Wheel Brushes



Appearance can vary from picture depending on variant.



EUPBWB018 | SUPERIOR ★★★★☆

Wheel brushes, knotted wire

Knotted wheel brush, industrial quality, for mounting on stationary machines.

- Knots are guided and secured in position, thereby prevent early wire breaks
- Slightly open knotting

Application: Weld seam cleaning, deburring of cast iron and steel parts with high burr generation, removal of overruns on rubber-bonded- to-metal components, removal of insulation/coatings.


Please note: For other bore sizes, refer to table "Standard Bores for Single-Row Brushes"

0002-664 152 B min. and B max. = pipe diameter – for reducing the bore size, refer to the 1-A adapter

Ø	A	T	B min.	B max.	RPM max.	DU	Steel 0.35	Steel 0.50	Steel 0.80
200	13	42	20	50.8	8500	1	● 0002-664 131	● 0002-664 151	● 0002-664 181
200	26	42	12.7	50.8	8500	1		● 0002-664 152	
250	15	42	25.4	50.8	4500	2	● 0002-676 131	● 0002-676 151	● 0002-676 181
300	18	55	25.4	50.8	3600	2	● 0002-686 131	● 0002-686 151	● 0002-686 181



Appearance can vary from picture depending on variant.



EUPBWB019 | SUPERIOR ★★★★☆

Joint brushes, knotted wire

Knotted joint brush, industrial quality, for use on a cutting machine for road-construction.

- For speedy and efficient work
- Excellent cleaning of tight spaces that are difficult to access

Application: Removal of stones, gravel and other debris from (expansion) joints during road-construction.

Please note: For other bore sizes, refer to table "Standard Bores for Single-Row Brushes"




Joint brush used in road construction



before



after

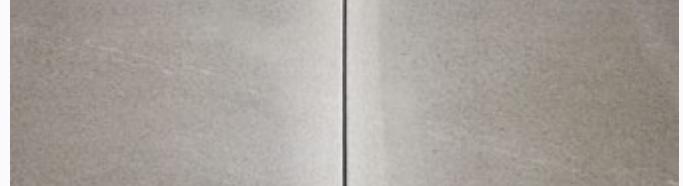


Ø	A	T	B	RPM max.	DU	Steel 0.50	Steel 0.80
300	4	65	20	4500	6	● 9802-026 560	
300	6	65	20	4500	6	● 9802-026 561	● 9802-026 581
300	8	65	20	4500	6	● 9802-026 562	● 9802-026 582
300	10	65	20	4500	6	● 9802-026 563	● 9802-026 583

Stationary Machines

Wheel Brushes



Appearance can vary from picture depending on variant.



EUPBWB020 | SUPERIOR ★★★★☆

Wheel brushes, crimped wire

Wheel brush with crimped wire, industrial quality, for mounting on stationary machines.

- Several brushes of the same kind can be mounted on one shaft to increase the working width
- TÜV-Süd certified (safety tested, production monitored)
- Very high flexibility
- Suitable for geometrically challenging parts

Application: Smoothing, deburring, edge rounding, texturing, rust removal and paint stripping of steel, cast steel and stainless steel.


Please note: For other bore sizes, refer to table "Standard Bores for Single-Row Brushes"

Ø	A	T	B min.	B max.	RPM max.	DU	Steel 0.20	Steel 0.30
75	11	15	13	13	10000	5		● 0002-511 161
100	13	23	13	20	8000	8	● 0002-522 141	● 0002-522 161
125	15	35	13	20	6000	5		● 0002-532 161
150	16	32	13	32	6000	4	● 0002-544 141	
150	16	32	13	32	6000	8		● 0002-544 161
178	18	45	13	32	6000	4	● 0002-554 141	
178	18	45	13	32	6000	8		● 0002-554 161
200	19	33	19	50.8	4500	1		● 0002-566 161
200	19	38	19	50.8	4500	2	● 0002-566 141	
250	22	35	20	50.8	3600	2	● 0002-576 141	● 0002-576 161
300	26	58	20	50.8	3000	1		● 0002-587 161

Ø	A	T	B min.	B max.	RPM max.	DU	INOX 0.20	INOX 0.30
100	13	23	13	20	8000	8	● 0002-522 341	● 0002-522 361
125	15	35	13	20	6000	5		● 0002-532 361
150	16	32	13	32	6000	2		● 0002-544 361
150	16	32	13	32	6000	3	● 0002-544 341	
178	18	45	13	32	6000	4	● 0002-554 341	● 0002-554 361
200	19	38	19	50.8	4500	2		● 0002-566 361
250	22	35	20	50.8	3600	2	● 0002-576 341	● 0002-576 361
300	26	58	20	50.8	3000	2	● 0002-587 341	



Appearance can vary from picture depending on variant.



EUPBWB021 | SUPERIOR ★★★★☆

Band saw brush

Band saw brush with nylon trim, industrial quality, for mounting on stationary machines.

- Long service life; efficient working
- Prolonged saw blade life
- The saw blade can work through the wood easier because there is no great generation of chips

Application: Cleaning the chip chambers of saw blades. When the brush presses against the moving saw blade, the brush is set into motion and the brush cleans the chip chambers of saw blades


Ø	A	T	B	RPM max.	DU	Nylon 0.80
100	15	20	13	8000	10	● 0003-515 827

Stationary Machines

Wheel Brushes



Appearance can vary from picture depending on variant.



EUPBWB022 | EVOLUTION ★★★★★

Wheel brushes, crimped Osborn wire

Crimped wheel brush, high-end quality, for mounting on stationary machines.

- Specially hardened Osborn wire for industrial applications
- Several brushes of the same kind can be mounted on one shaft
- Very high wire count / wire density
- Filled without gaps; Lower wear
- Homogeneous results

Application: Automated manufacturing processes for the deburring of machined and sawn cutting edges and surfaces.

Please note: For other bore sizes, refer to table "Standard Bores for Single-Row Brushes"



MONITOR® – Round bore



MATIC® – Keyway bore




MASTER® – Turtle bore

Ø	A	T	B	B Type	Adapt.	RPM max.	DU	Steel 0.15	Steel 0.20
200	18	38	50.8	keyways	1A	4500	2	● 9906-021 183	● 9906-021 184
200	22	37	50.8	keyways	1A	4500	1	● 9906-022 081	● 9906-022 082
250	26	60	50.8	turtle	4M	3600	2		● 9906-013 008

Ø	A	T	B	B Type	Adapt.	RPM max.	DU	Steel 0.30	INOX 0.26
150	14	29	31.8	round	3A	6000	6		● 9906-021 059
200	22	37	50.8	keyways	1A	4500	2	● 9906-022 085	
250	26	60	50.8	turtle	4M	3600	2	● 9906-013 009	
300	28	60	50.8	turtle	4M	3000	2	● 9906-013 021	
380	32	72	50.8	turtle	4M	2400	1	● 9906-013 057	



Appearance can vary from picture depending on variant.



Bore reduction pieces included

- Ø 75-125 mm: 20 mm | 1/2" and 5/8"
- Ø 150-200 mm: 31.75 | 13 | 15 | 16 | 19 | 20 mm | 7/8" and 1"

Ø	A	T	B max.	RPM max.	DU	Steel 0.20	Steel 0.30	Steel 0.50
75	19	16	20	10000	4		● 9902-511 162	
100	20	23	20	8000	5	● 9902-522 142	● 9902-522 162	
100	28	23	20	8000	5		● 9902-522 163	
125	22	30	20	6000	5	● 9902-532 142	● 9902-532 162	
125	30	30	20	6000	5		● 9902-532 163	
150	21	25	31.75	6000	3	● 9902-544 441	● 9902-544 461	● 9902-544 491
150	30	29	31.75	6000	3	● 9902-544 142	● 9902-544 162	
150	37	29	31.75	6000	3		● 9902-544 163	● 9902-544 193
178	23	38	31.75	6000	1	● 9902-554 441	● 9902-554 461	
178	32	38	31.75	6000	1	● 9902-554 142	● 9902-554 162	● 9902-554 192
178	38	38	31.75	6000	1		● 9902-554 163	
200	20	38	31.75	4500	1	● 9902-566 441	● 9902-566 461	● 9902-566 491
200	30	38	31.75	4500	1	● 9902-566 142	● 9902-566 162	● 9902-566 192
200	38	38	31.75	4500	1	● 9902-566 143	● 9902-566 163	● 9902-566 193
250	28	47	50.8	3600	1	● 9902-576 142	● 9902-576 162	● 9902-576 192
250	38	47	50.8	3600	1	● 9902-576 143	● 9902-576 163	● 9902-576 193
250	55	47	50.8	3600	1		● 9902-576 464	
300	32	50	50.8	3000	1	● 9902-587 142	● 9902-587 162	● 9902-587 192
300	44	50	50.8	3000	1	● 9902-587 143	● 9902-587 163	● 9902-587 193
300	46	50	101.6	3000	1		● 0002-587 162	

more on next page →


Stationary Machines

Wheel Bruhes

Ø	A	T	B max.	RPM max.	DU	INOX 0.20	INOX 0.30	
75	19	16	20	10000	4		● 9902-511 362	
100	20	23	20	8000	4	● 9902-522 342	● 9902-522 362	
100	28	23	20	8000	4		● 9902-522 363	
125	22	30	20	6000	2	● 9902-532 342	● 9902-532 362	
125	30	30	20	6000	2		● 9902-532 363	
150	21	25	31.75	6000	2	● 9902-544 341	● 9902-544 361	
150	30	29	31.75	6000	2	● 9902-544 342	● 9902-544 362	
178	23	38	31.75	6000	1	● 9902-554 341	● 9902-554 361	
178	32	38	31.75	6000	1		● 9902-554 362	
200	20	38	31.75	4500	1	● 9902-566 341	● 9902-566 361	
200	30	38	31.75	4500	1	● 9902-566 342	● 9902-566 362	
200	38	38	31.75	4500	1		● 9902-566 363	
250	28	47	50.8	3600	1	● 9902-576 342	● 9902-576 362	
250	38	47	50.8	3600	1	● 9902-576 343	● 9902-576 363	
300	32	50	50.8	3000	1	● 9902-587 342	● 9902-587 362	
300	44	50	50.8	3000	1	● 9902-587 343	● 9902-587 363	



Appearance can vary from picture depending on variant.



EUPBWB024 | SUPERIOR ★★★★☆

Wheel brushes, crimped wire

Multi-row wheel brush with crimped wire, industrial quality, for mounting on stationary machines.

- Flexible variant due to extra long trim length
- TÜV-Süd certified (safety tested, production monitored)
- Adapts perfectly to the contours of the workpiece
- High wire density

Application: Fine surface finishing on geometrically challenging parts.

Please note: For other bore sizes, refer to table "Standard Bores for Multi-Row Brushes"

Bore reduction pieces included

- Ø 75-125 mm: 20 mm | 1/2" and 5/8"
- Ø 150-200 mm: 31.75 | 13 | 15 | 16 | 19 | 20 mm | 7/8" and 1"

Ø	A	T	B max.	R	RPM max.	DU	Steel 0.20	Steel 0.30	INOX 0.20
150	24	43	20	20	6000	3	● 9902-543 142	● 9902-543 162	
178	32	43	31.75	31.75	6000	1		● 9902-553 162	
200	33	55	31.75	31.75	4500	1	● 9902-565 142	● 9902-565 162	
200	42	55	31.75	31.75	4500	1		● 9902-565 163	
250	32	63	50.8	80	3600	1	● 9902-575 142	● 9902-575 162	● 9902-575 342
250	42	63	50.8	80	3600	1		● 9902-575 163	
300	33	70	50.8	100	3000	1	● 9902-586 142	● 9902-586 162	● 9902-586 342
300	45	70	50.8	100	3000	1		● 9902-586 163	● 9902-586 343

Ø	A	T	B max.	R	RPM max.	DU	INOX 0.30	Brass 0.20	Brass 0.30
150	24	43	20	20	6000	2	● 9902-543 362	● 9902-543 542	● 9902-543 562
150	32	43		20	6000	2		● 9902-543 543	
150	32	43	20	20	6000	2			● 9902-543 563
200	33	55	31.75	31.75	4500	1	● 9902-565 362	● 9902-565 542	● 9902-565 562

Stationary Machines

Wheel Brushes




EUPBWB025 | SUPERIOR ★★★★☆

Wheel brushes for table-deburring machines, crimped wire

Wheel brush with crimped wire, industrial quality, for mounting on deburring machines.

Appearance can vary from picture depending on variant.



- Particularly dense and compact design with maximum number of wires for high deburring performance and excellent service life
- Statically balanced with high level of concentricity accuracy
- Adoptions with double keyways and regular holes for all common table deburrers
- Special adapters possible on request


Application: Cutting edge deburring of pipes, profiles and flat parts on table deburrer and automated machines.

∅	A	T	R	Adapt.	RPM max.	DU	Steel 0.20	Steel 0.30	Steel 0.35	Steel 0.50
250	55	35	100	AS-TE	3600	1			● 0042-576 175	
250	55	45	100	AS-TE	3600	1		● 0042-576 165		
250	65	45	100	AS-TE	3600	1	● 0002-576 145			● 0002-576 195
300	55	70	100	AS-TE	2800	1			● 0002-586 175	

∅	A	T	R	Adapt.	RPM max.	DU	INOX 0.20	INOX 0.30	INOX 0.35	INOX 0.50
250	55	45	100	AS-TE	3500	1			● 0042-576 375	
250	55	45	100	AS-TE	3600	1	● 0002-576 345			
250	65	45	100	AS-TE	3600	1		● 0042-576 365		● 0002-576 395



Appearance can vary from picture depending on variant.



EUPBWB026 | SUPERIOR ★★★★☆

Wheel brushes for table-deburring machines, abrasive filament

Wheel brush with abrasive trim, industrial quality, for mounting on deburring machines.

- Particularly dense and compact design with maximum number of bristles for high deburring performance and excellent service life
- Statically balanced with high level of concentricity accuracy
- Adoptions with double keyways and regular holes for all common table deburrers
- Special adapters possible on request

Application: Cutting edge deburring of pipes, profiles and flat parts on table deburrer and automated machines.


Ø	A	T	R	Adapt.	RPM max.	DU	Silicon Carbide 0.90	Silicon Carbide 1.02	Silicon Carbide 1.27
250	65	45	100	AS-TE	3600	1	● 0002-576 916	● 0002-576 906	● 2102-576 916

Stationary Machines

Wheel Brushes



Appearance can vary from picture depending on variant.



EUPBWB027 | EVOLUTION ★★★★★

UNI-Master® wheel brushes, abrasive filament

Wheel brush with abrasive trim, industrial quality, for mounting on deburring machines.

- Particularly dense and compact design with maximum number of abrasive bristles for high deburring performance and excellent service life
- Statically balanced with high concentricity accuracy
- For dry and wet application
- Resistant to weak acids and bases
- Fitted individually or combined on shaft

Application: Cutting edge deburring of pipes, profiles and flat parts made of non-ferrous metals on table deburrer and automated machines.

Ø	A	T	B	B Type	Adapt.	RPM max.	DU	Silicon Carbide 0.56	Silicon Carbide 0.76	Silicon Carbide 0.90
75	12	15	15.88	round	HP	20000	6		● 9906-015 001	● 9906-015 003
75	12	15	16	round	HP	20000	6	● 9906-015 004		
100	13	20	15.88	round	HP	12000	6	● 9906-015 028		
100	16	20	15.87	round	HP	12000	6			● 9906-015 027
100	16	20	15.88	round	HP	12000	6		● 9906-015 025	
125	16	30	15.87	round	HP	12000	6	● 9906-015 038		
125	16	30	15.88	round	HP	12000	6		● 9906-015 035	● 9906-015 037
150	17	32	22.2	round	HP	8000	6	● 9906-015 082		● 9906-015 081
178	20	47	22.2	round	HP	8000	2	● 9906-015 043		● 9906-015 042
200	18	35	50.8	turtle	4M	6000	2	● 9906-015 053		● 9906-015 052
250	18	35	50.8	turtle	4M	3000	2	● 9906-015 059		● 9906-015 058
250	18	60	50.8	turtle	4M	3000	2			● 9946-015 058
250	18	60	50.8	turtle	4M	3600	2	● 9946-015 059		
300	18	35	50.8	turtle	4M	2400	2	● 9906-015 065		● 9906-015 064
300	18	60	50.8	turtle	4M	3000	2	● 9966-015 065		● 9966-015 064
350	19	55	50.8	turtle	4M	2400	2	● 9906-015 071		● 9906-015 070

Ø	A	T	B	B Type	Adapt.	RPM max.	DU	Silicon Carbide 1.02	Silicon Carbide 1.27	
75	12	15	15.88	round	HP	20000	6	● 9906-015 002		
100	13	20	15.88	round	HP	12000	6	● 9906-015 026		
125	16	30	15.88	round	HP	12000	6	● 9906-015 036		
150	17	32	22.2	round	HP	8000	6		● 9906-015 079	
150	17	32.5	22.2	round	HP	8000	6	● 9906-015 080		
178	20	47	22.2	round	HP	8000	2	● 9906-015 041	● 9906-015 040	
200	18	35	50.8	turtle	4M	6000	2	● 9906-015 051	● 9906-015 050	
250	18	35	50.8	turtle	4M	3000	2	● 9906-015 057	● 9906-015 056	
250	18	60	50.8	turtle	4M	3600	2	● 9946-015 057	● 9946-015 056	
300	18	35	50.8	turtle	4M	2400	2	● 9906-015 063	● 9906-015 062	
300	18	60	50.8	turtle	4M	3000	2	● 9966-015 063		
350	19	55	50.8	turtle	4M	2400	2	● 9906-015 069		



Appearance can vary from picture depending on variant.



EUPBWB028 | SUPERIOR ★★★★☆

Wheel brushes, abrasive filament

Wheel brush with abrasive bristles, industrial quality, for use on stationary machines.

- Cost-effective finishing of components with many contours in dry applications
- Suitable for defined edge rounding
- NHS trim material - Also suitable for use with coolants

Application: Finishing of surfaces and pipe/profile sections, particularly good for aluminium, non-ferrous metals and synthetics.

Please note: For other bore sizes, refer to table "Standard Bores for Single-Row Brushes"

9902-515 001 Suitable for use with coolants

9902-515 025 Suitable for use with coolants

Ø	A	T	B min.	B max.	B	RPM max.	DU	Silicon Carbide 0.60	Silicon Carbide 0.76	Silicon Carbide 1.00
75	12	13	13	13	13	20000	6	● 9902-515 004	● 9902-515 001	● 9902-515 003
100	18	18	13	20	13	12000	6	● 9902-515 028	● 9902-515 025	● 9902-515 027
150	18	32	13	32	13	6000	6	● 9902-515 082		
150	18	32	13	44	13	6000	6			● 9902-515 081
178	18	45	13	32	13	8000	4	● 9902-515 043		● 9902-515 042
200	18	31	19	50.8	19	6000	2	● 9902-515 053		● 9902-515 052
250	18	60	20	50.8	20	3000	2	● 9962-515 059		
250	18	60	20	50.8	20	3600	2			● 9962-515 058
250	20	35	20	50.8	20	3000	2			● 9902-515 058
300	20	35	20	50.8	20	2400	2	● 9902-515 065		● 9902-515 064
300	20	60	20	50.8	20	3000	2	● 9962-515 065		● 9962-515 064


Ø	A	T	B min.	B max.	B	RPM max.	DU	Silicon Carbide 1.10	Silicon Carbide 1.20	
75	12	13	13	13	13	20000	6	● 9902-515 002		
100	18	18	13	20	13	12000	6	● 9902-515 026		
150	18	32	13	44	13	6000	6		● 9902-515 079	
150	18	32	13	44	13	8000	6	● 9902-515 080		
178	18	45	13	32	13	8000	4	● 9902-515 041	● 9902-515 040	
200	18	31	19	50.8	19	6000	2	● 9902-515 051	● 9902-515 050	
250	18	60	20	50.8	20	3000	2	● 9962-515 057	● 9962-515 056	
250	20	35	20	50.8	20	3600	2	● 9902-515 057	● 9902-515 056	
300	20	35	20	50.8	20	2400	2	● 9902-515 063	● 9902-515 062	
300	20	60	20	50.8	20	3000	2	● 9962-515 063	● 9962-515 062	
350	20	57	32	50.8	32	2400	2	● 9902-515 069		

Stationary Machines

Wheel Brushes



Appearance can vary from picture depending on variant.



EUPBWB031 | XTREME ★★★★★★★

Wheel brushes for table-deburring machines, Xtreme wire, crimped

Wheel brushes with crimped Xtreme wire in high-end quality for use on stationary machines.


- Particularly high wire density
- Aggressive design
- High deburring performance and outstanding tool life
- Adjustable immersion depth - adapts to the contours of complex components
- Fast and effective deburring of inner and outer edges of pipe ends in a single step

Application: For deburring the end faces of tubes, profiles and flat parts, edge deburring

Ø	A	T	B	B Type	RPM max.	DU	Steel 0.30
250	60	53	50.8	keyways	3600	1	● 3902-576 175



Appearance can vary from picture depending on variant.



EUPBWB032 | XTREME ★★★★★★★

UNI-Master® Wheel brushes, Xtreme wire, crimped

Wheel brush with crimped Xtreme wire in high-end quality for use on stationary machines.

- Higher removal rate, aggressive removal of burrs
- High wire density and very flexible at the same time
- Can be mounted individually or assembled on a shaft
- Excellently suited for machining geometrically complex components as the brush adapts to the contour of the workpiece

Application: Automated production processes for deburring of machined and sawn cutting edges and surfaces

Ø	A	T	B	Adapt.	RPM max.	DU	Steel 0.30
250	26	60	50.8	4M	3600	2	● 3906-013 009
300	28	60	50.8	4M	3000	2	● 3906-013 021
380	32	72	50.8	4M	2400	2	● 3906-013 057



Appearance can vary from picture depending on variant.



EUPBRB001 | SUPERIOR ★★★★☆

Roller brushes for deburring machines, crimped wire

Roller brush with crimped wire, industrial quality, for use on deburring machines.

- Dense and uniform trim distribution ensures homogeneous finish results; speedy and efficient deburring
- Long service life; therefore reduced tool and unit costs

Application: Deburring, weld seam finishing, rust/paint removal

Please note: Other circular and roller brushes for all popular deburring machines are available on request.

Ø	A	T	B	RPM max.	DU	Steel 0.35	INOX 0.30
300	460	60	120	3600	1	● 4602-743 178	
300	600	60	120	3600	1	● 8802-753 478	● 1302-753 368



Appearance can vary from picture depending on variant.



EUPBEB015 | SUPERIOR ★★★★☆

End brushes for brush heads, crimped wire

End brushes with crimped wire, high-end quality, for use in a brush head.

- Long service life, so reduced tool costs
- For speedy and efficient working
- The eccentric and oscillating circular motion increases the working radius of the brush
- For all profile contours

Application: Deburring of the cutting edges of pipe ends and profiles, and surface deburring with eccentric and oscillating circular motion.

Ø	T	L	DU	INOX 0.20	Steel 0.20
25	95	25	16	● 0002-509 348	● 0002-509 448

Ø	T	L	DU	Steel 0.35	Steel 0.50
25	95	25	16	● 0002-509 478	● 0002-509 498

Stationary Machines

Accessories



EUACAD006

Axis discs

Axis discs for table deburring machines.

Appearance can vary from picture depending on variant.

adapt. from	adapt. to	DU	Item Number
100.00	50.80	1	● 5495-560 051
100.00	52.90	1	● 5495-560 052
100.00	54.70	1	● 5495-560 054
100.00	80.20	1	● 5495-560 080
100.00	82.00	1	● 5495-560 082



EUACAD007

4-M adapters for tortoise-shape bores

4-M adapters for the bore reduction of narrow wheel brushes with 2" / 50.8 mm turtle-shape bore. Reusable.

Appearance can vary from picture depending on variant.

adapt. from	adapt. to	DU	Item Number
50.80	19.05	1	● 0003-075 066
50.80	22.20	1	● 0003-075 067
50.80	25.40	1	● 0003-075 068
50.80	28.00	1	● 0003-075 069



Appearance can vary from picture depending on variant.

EUACAD008


Reducing Ring "HP-Adapter"

Reducing Rings provide a reliable solution for precisely adapting standard bore sizes to smaller diameters.

adapt. from	adapt. to	DU	Item Number
16.00	9.50	1	● 0003-000 222
16.00	12.70	1	● 0003-000 223
22.20	9.50	1	● 0003-000 242
22.20	12.70	1	● 0003-000 243
22.20	16.00	1	● 0003-000 244

Stationary Machines

Accessories

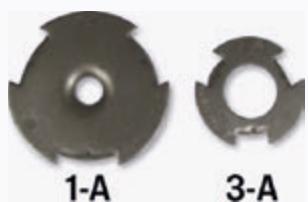

Appearance can vary from picture depending on variant.

EUACAD004

Interchangeable metal adapters

1-A metal adapter interchangeable for reduction of arbor holes from bore 50,8 (2") to bore 12,7 (1/2"). Metal adapter 3-A for reducing the bore from 31,75 (1-1/4") to 13.

- Contains 1 pair = 2 pieces
- Reusable

Adapt.	adapt. from	adapt. to	DU	Item Number
1A	50.80	12.70	1	● 0103-075 021
1A	50.80	31.75	1	● 0103-075 027
1A	50.80	38.00	1	● 0103-075 028
3A	31.75	12.70	1	● 0103-075 048
3A	31.75	19.00	1	● 0103-075 050
3A	31.75	22.20	1	● 0103-075 051
1A	50.80	10.00	1	● 0103-075 210
1A	50.80	13.00	1	● 0103-075 213
1A	50.80	16.00	1	● 0103-075 216
1A	50.80	20.00	1	● 0103-075 220
1A	50.80	25.00	1	● 0103-075 225
1A	50.80	30.00	1	● 0103-075 230
1A	50.80	32.00	1	● 0103-075 232
1A	50.80	35.00	1	● 0103-075 235
1A	50.80	40.00	1	● 0103-075 240
3A	31.75	13.00	1	● 0103-075 313
3A	31.75	16.00	1	● 0103-075 316
3A	31.75	20.00	1	● 0103-075 320
3A	31.75	25.00	1	● 0103-075 325

0	0003000244	19	9802026562	5	9902543543	11	
0002509348	17	0003075066	18	9802026563	5	9902543562	11
0002509448	17	0003075067	18	9802026581	5	9902543563	11
0002509478	17	0003075068	18	9802026582	5	9902544142	9
0002509498	17	0003075069	18	9802026583	5	9902544162	9
0002511161	6	0003515827	7	9902511162	9	9902544163	9
0002522141	6	0042576165	12	9902511362	10	9902544193	9
0002522161	6	0042576175	12	9902515001	15	9902544341	10
0002522341	6	0042576365	12	9902515002	15	9902544342	10
0002522361	6	0042576375	12	9902515003	15	9902544361	10
0002532161	6	0103075021	20	9902515004	15	9902544362	10
0002532361	6	0103075027	20	9902515025	15	9902544441	9
0002544141	6	0103075028	20	9902515026	15	9902544461	9
0002544161	6	0103075048	20	9902515027	15	9902544491	9
0002544341	6	0103075050	20	9902515028	15	9902553162	11
0002544361	6	0103075051	20	9902515040	15	9902554142	9
0002554141	6	0103075210	20	9902515041	15	9902554162	9
0002554161	6	0103075213	20	9902515042	15	9902554163	9
0002554341	6	0103075216	20	9902515043	15	9902554192	9
0002554361	6	0103075220	20	9902515050	15	9902554341	10
0002566141	6	0103075225	20	9902515051	15	9902554361	10
0002566161	6	0103075230	20	9902515052	15	9902554362	10
0002566361	6	0103075232	20	9902515053	15	9902554441	9
0002576141	6	0103075235	20	9902515056	15	9902554461	9
0002576145	12	0103075240	20	9902515057	15	9902565142	11
0002576161	6	0103075313	20	9902515058	15	9902565162	11
0002576195	12	0103075316	20	9902515062	15	9902565163	11
0002576341	6	0103075320	20	9902515063	15	9902565362	11
0002576345	12	0103075325	20	9902515064	15	9902565542	11
0002576361	6	1		9902515065	15	9902565562	11
0002576395	12	1302753368	17	9902515069	15	9902566142	9
0002576906	13	2		9902515079	15	9902566143	9
0002576916	13	2102576916	13	9902515080	15	9902566162	9
0002586175	12	3		9902515081	15	9902566163	9
0002587161	6	3902576175	16	9902515082	15	9902566192	9
0002587162	9	3906013009	16	9902522142	9	9902566193	9
0002587341	6	3906013021	16	9902522162	9	9902566341	10
0002664131	4	3906013057	16	9902522163	9	9902566342	10
0002664151	4	4		9902522342	10	9902566361	10
0002664152	4	4602743178	17	9902522362	10	9902566362	10
0002664181	4	5		9902522363	10	9902566363	10
0002676131	4	5495560051	18	9902532142	9	9902566441	9
0002676151	4	5495560052	18	9902532162	9	9902566461	9
0002676181	4	5495560054	18	9902532163	9	9902566491	9
0002686131	4	5495560080	18	9902532342	10	9902575142	11
0002686151	4	5495560082	18	9902532362	10	9902575162	11
0002686181	4	8		9902532363	10	9902575163	11
0003000222	19	8802753478	17	9902543142	11	9902575342	11
0003000223	19	9		9902543162	11	9902576142	9
0003000242	19	9802026560	5	9902543362	11	9902576143	9
0003000243	19	9802026561	5	9902543542	11	9902576162	9

SKU Index

9902576163	9	9902587362	10	9906015043	14	9906021183	8
9902576192	9	9902587363	10	9906015050	14	9906021184	8
9902576193	9	9906013008	8	9906015051	14	9906022081	8
9902576342	10	9906013009	8	9906015052	14	9906022082	8
9902576343	10	9906013021	8	9906015053	14	9906022085	8
9902576362	10	9906013057	8	9906015056	14	9946015056	14
9902576363	10	9906015001	14	9906015057	14	9946015057	14
9902576464	9	9906015002	14	9906015058	14	9946015058	14
9902586142	11	9906015003	14	9906015059	14	9946015059	14
9902586162	11	9906015004	14	9906015062	14	9962515056	15
9902586163	11	9906015025	14	9906015063	14	9962515057	15
9902586342	11	9906015026	14	9906015064	14	9962515058	15
9902586343	11	9906015027	14	9906015065	14	9962515059	15
9902587142	9	9906015028	14	9906015069	14	9962515062	15
9902587143	9	9906015035	14	9906015070	14	9962515063	15
9902587162	9	9906015036	14	9906015071	14	9962515064	15
9902587163	9	9906015037	14	9906015079	14	9962515065	15
9902587192	9	9906015038	14	9906015080	14	9966015063	14
9902587193	9	9906015040	14	9906015081	14	9966015064	14
9902587342	10	9906015041	14	9906015082	14	9966015065	14
9902587343	10	9906015042	14	9906021059	8		



osborn.com